

NATIONAL INSTITUTE OF TECHNOLOGY KARNATAKA, SURATHKAL

## POST SRINIVASNAGAR, MANGALURU – 575 025



Phone: (0824) 2474 000. Fax: (0824) 2474 033/ 2474 039

E- mail: registrar@nitk.ac.in

Website: http://www.nitk.ac.in

## No. 07/ NITK/ MECH- FUR/OH-35 / 2019-20 / B4

## ADDENDUM - 01

Name of Work: Manufacturing, Supply and installation furniture to Mechanical Engineering Department, NITK, Surathkal


Tender Ref.No: 07 / NITK / MECH- FUR / OH-35 / 2019-20 / B4 Dated: 07.02.2020

Attention is invited to the Open Tender ref no. No. 07/ NITK/ MECH- FUR/OH-35 / 2019-20 / B4. The following changes have been highlighted below in the red colour right hand side of the table. The below mentioned point is to be noted before quoting the same.

As existing in the Tender Document Specification	To be read as
Conference Table (34-Seater - Similar to Godrej SENATE)Tops: Work surface: Top thickness 31.6 (18mm + 12mm + 0.6 mm DL(both sides) + 0.4mmMembrane) Edge profile Waterfall Edge 10mm radius on top edge and 5mm at bottom.Understructure: Legs Modesty Panel: Made from 25mm PPB having a straight profile with half roundedges and clad with 0.6mm thick Post Forming laminate. Overall thickness of leg is 26.2mm.Made from PLT (Prelaminated Twin) boards of 18mm thick.Wire Manager: Wire Carrier Carrier Cover: Made from 0.6mm thick CRCA painted.Made of 12mm thick. MDF Painted all over.Substrate: MDFSkin: PVC Membrane foil (0.4mm thk) clad on the substrate MDF using PU glue for better adhesion.This foil is pre-coated with layer of polyurethane for better scratch resistanceTable Size: Width = 12 Meters (approx.)Depth = 1.43 Meters (approx)Seating Capacity: 34-Seater ( 2Nos Single Seater, 14 Nos Two Seater & 2Nos Two Seater (Half Circle )	Conference Table (34-Seater - Similar to Godrej SENATE)Tops: Work surface: Top thickness 31.6 (18mm + 12mm + 0.6 mm DL(both sides) + 0.4mmMembrane) Edge profile Waterfall Edge 10mm radius on top edge and 5mm at bottom.Understructure: Legs Modesty Panel: Made from 25mm PPB having a straight profile with half roundedges and clad with 0.6mm thick Post Forming laminate. Overall thickness of leg is 26.2mm.Made from PLT (Prelaminated Twin) boards of 18mm thick.Wire Manager: Wire Carrier Carrier Cover: Made from 0.6mm thick CRCA painted.Made of 12mm thick. MDF Painted all over.Substrate: MDFSkin: PVC Membrane foil (0.4mm thk) clad on the substrate MDF using PU glue for better adhesion.This foil is pre-coated with layer of polyurethane for better scratch resistanceTable Size: Width = 1426 mm (approx.)Depth = 750mm (approx.)Seating Capacity: 34-Seater ( 2Nos Single Seater, 14 Nos Two Seater& 2Nos Two Seater (Half Circle )

Date: 03 - 03 - 2020

Heavy Duty Table Length – 1828 mm (6ft), Width 3ft, Height 853 mm (2.8 ft) with granite Top. Made of finely polished (18 mm) thick jet-black Granite top with rounded edge	Heavy Duty Table Length – 1828 mm (6ft), Width 914.4 mm (3ft), Height 853 mm (2.8 ft) with granite Top. Made of finely polished (18 mm) thick jet-black Granite top with rounded edge
Wooden Bench Supplying of wooden Bench of size 2.15 m x 0.45 m x 0.45 m made by using well seasoned First class Mahagony wood(Swietenia Maerophylla), free from knots, with 6 numbers of legs of size 60mm x 60mm. The Bench should be provided 30mm thick wooden plank for seat & 20mm thick wooden plank for back rest. 40 mm x 60 mm size wood for seat supports. 60 mm x 30 mm size wood for back supports. 40 mm x 40 mm size wood for bottom leg support ties. All the wooden sizes are finished thickness before applying melamine spray. All the wooden surfaces should be treated with sanding sealer mixed with thinner, after rubbing with zero size sand paper and applying sealer coat by way of spraying with necessary compressor and after rubbing with steel wool, applying two coats of approved shade of melamine spray polish Interior grade matt finish to provide anti - scratch and anti - strain properties (second coat of spray polish to be applied after drying of first coat) of approved make and colour to give good finish as per the specification. Size : 2.15 m (L) x 0.45 m (W) x 0.45 m (H)	Wooden Bench Supplying of wooden Bench of size 2.15 m x 0.45 m x 0.45 mmade by using well seasoned First class Mahagony wood(Swietenia Maerophylla),free from knots, with 6 numbers of legs of size 60mm x 60mm. The Bench should be provided 30mm thick wooden plank for seat & 20mm thick wooden plank for back rest. 40 mm x 60 mm size wood for seat supports. 60 mm x 30 mm size wood for back supports. 40 mm x 40 mm size wood for bottom leg support ties. All the wooden sizes are finished thickness before applying melamine spray. All the wooden surfaces should be treated with sanding sealer mixed with thinner, after rubbing with zero size sand paper and applying sealer coat by way of spraying with necessary compressor and after rubbing with steel wool, applying two coats of approved shade of melamine spray polish Interior grade matt finish to provide anti -scratch and anti -strain properties (second coat of spray polish to be applied after drying of first coat) of approved make and colour to give good finish as per the specification. Size is 2.15M (L) X 0.45M (W) X0.93M(H)
Wooden Desk Supplying of Class room Wooden Desks of size 2.15 m x 0.45 m x 0.75 m, made by using well- seasoned First class Mahagony wood (Swietenia Maerophylla), free from knots, with 6 numbers of legs of size 60mm x 60mm. The Desk top & bottom planks should be 25 mm thick Mahagony wood planks. Leg support ties & Central foot rest of size 40 mm x 50 mm. Top three sides support planks should be 25mm thick. All the wooden sizes are finished thickness before applying melamine spray polish. All the wooden surfaces should be treated with sanding sealer mixed with thinner, after rubbing with zero size sand paper and applying sealer coat by way of spraying with necessary compressor and after rubbing with steel wool, applying two coats of approved shade of melamine spray polish Interior grade matt finish to provide anti - scratch and anti - strain properties (second coat of melamine spray polish to be applied after drying of first coat) of approved make colour to give good finish as per the specification. Size : 2.15 m (L) x 0.45 m (W) x 0.75 m (H)	Wooden Desk Wooden Desk Supplying of Class room Wooden Desks of size 2.15 m x 0.45 m x 0.75 m, made by using well-seasoned <b>First class Mahagony wood(Swietenia Maerophylla)</b> ,free from knots, with 6 numbers of legs of size 60mm x 60mm. The Desk top & bottom planks should be 25 mm thick Mahagony wood planks. Leg support ties & Central foot rest of size <b>40 mm x 50 mm</b> . Top three sides support planks should be 25mm thick. All the wooden sizes are finished thickness before applying melamine spray polish. All the wooden surfaces should be treated with sanding sealer mixed with thinner, after rubbing with zero size sand paper and applying sealer coat by way of spraying with necessary compressor and after rubbing with steel wool, applying two coats of approved shade of melamine spray polish Interior grade matt finish to provide anti -scratch and anti -strain properties (second coat of melamine spray polish to be applied after drying of first coat) of approved make colour to give good finish as per the specification. <b>Size : 2.15 m (L) x 0.45 m (W) x 0.75 m (H)</b>

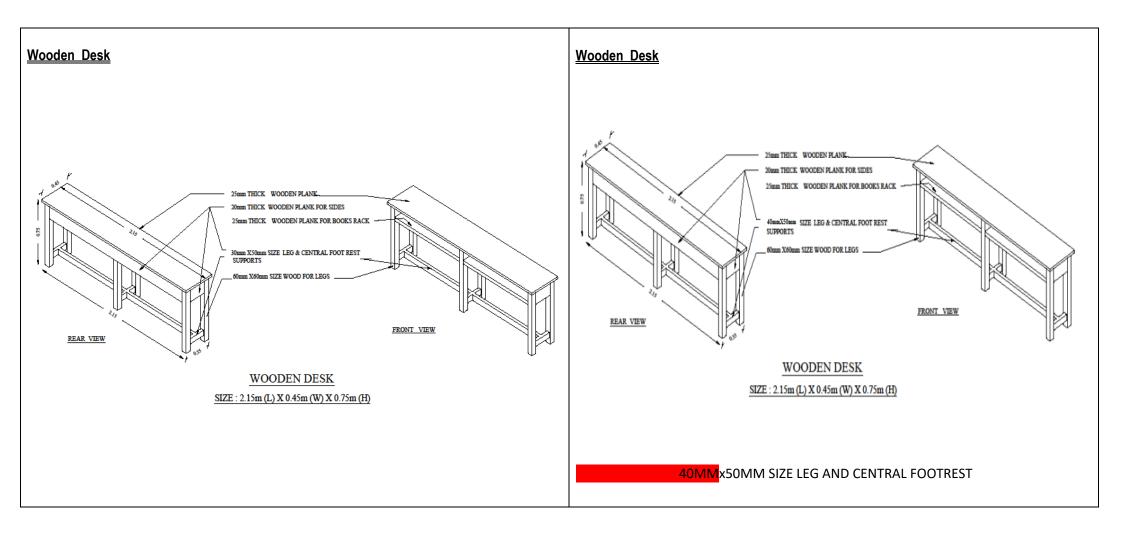

The remaining specifications and terms & conditions of the tender are remain same.

Yours sincerely

Sd/-

## REGISTRAR

NITK, Surathkal